

<b>Product identification</b>	<b>C 5 G-AR G60</b>	<b>Article number</b>	<b>30400020</b>
-------------------------------	---------------------	-----------------------	-----------------

<b>Product group</b>	Conveyor belt
<b>Function</b>	transportation
<b>Application</b>	Conveyor systems, sorting systems, distributing systems, feeding systems
<b>Industry</b>	Paper industry, packaging, wood industry, logistics, metal and machinery industry

## Product construction


Material friction cover	Elastomer
Characteristics friction cover	Super grip
Color friction cover	green
Thickness friction cover	5,2 mm
Material traction layer	polyamide
Material reverse cover	Elastomer
Characteristics reverse cover	rough structured
Color reverse cover	green
Thickness reverse cover	0,75 mm

## Product characteristics

Total thickness	6,2 mm (± 0,35 mm)
Belt weight	5,4 kg/m <sup>2</sup>
Standard production width	500 mm
Maximum tensile force	150 N/mm
-at 1% elongation	5 N/mm
Minimum pulley diameter	80 mm
Operating temperatures	Min: -20 °C    -4 °F    Max: 80 °C    176 °F
Permanently antistatic DIN EN 20284	yes
Flammability DIN EN 20340	no
Chemical resistance	oil and grease resistant

## Endless joining

Recommended joining	Wedge joining
Joining length	140 mm




## Joining material

Polyamide glue	Glue F
Rubber glue	Total Syntic
Additional material	---

Note: Allow both adhesives to evaporate for app. 5 minutes after application

## Joining parameters

Pressing temperatures	120 °C    248 °F
Pressing time	45 minutes

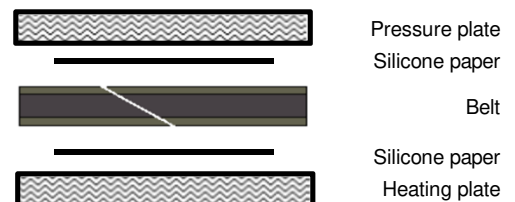

## Alternative joining methods

Finger joining	no
Step joining	no
Mechanical joining	A4

The listed performance data, information on application and use are only recommendations and were identified under normal conditions and are subject to the changes through continuous development. Since the VIS GmbH has no influence on the specific conditions of use, there can be differences in the data and information. Therefore, no liability can be accepted for the qualification of the product for the specific application.